

**TERRAZZO WHEELCHAIR  
SHOWER RECEPTOR - WTR SERIES**

- One piece product made of black and white marble chips cast in white Portland cement
- Compressive strength of not less than 3,000 p.s.i. seven days after casting
- The surface is ground and polished with all air holes and/or pits grouted and the excess removed
- Integral stainless steel entry cap
- Available in custom sizes

**Instructions:**

- For wheelchair accessibility, receptor threshold entry height shall be 1/2" (13mm) complying with the barrier free requirements of ANSI Standard A-117.1-2000 and ADAAG
- Tiling flange cast integral shall be galvanized-bonderized steel and shall extend not less than 1" (25mm) above shoulder
- Shoulder shall not be less than 4" (102mm) high inside, 6" (152mm) high outside and not less than 3" (76mm) wide
- Drain body shall be stainless steel cast integral, and shall provide for a caulked lead connection not less than 1" (25mm) deep to a 2" (51mm) pipe, or a quick drain connection using a QDC-4 connector and shall include a removable stainless steel or brass strainer plate
- It is recommended that a floor drain at or near the entrance to the shower also be included
- Establish 1/4" (6mm) clearance between shower floor and building wall
- It is required that the entire area between the receptor and the building floor has a 1/2" (13mm) layer of mortar in order that the shower floor be level



SEE REVERSE FOR ROUGHING-IN DIMENSIONS


**NOTES:**

Establish 1/4" clearance between shower floor and wall. It is required that the entire area between the receptor and the building floor have a 1/2" layer of mortar in order that shower floors be level.


It is recommended that a floor drain be installed at or near the entrance of the shower.

All models comply with Americans With Disabilities Act and A117.1 handicapped standards.


**IMPORTANT:** Rough-in dimensions may vary 1/2" and are subject to change or cancellation without prior notice.

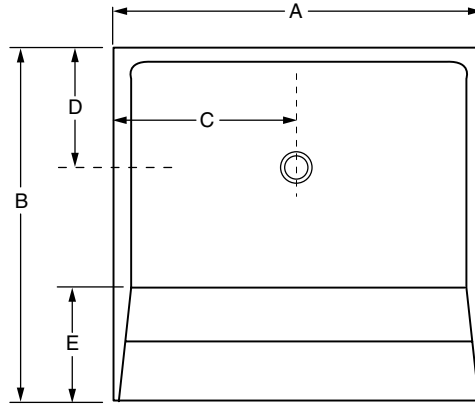

FRONT OF SHOWER

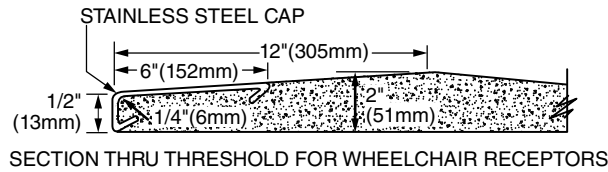

SECTION THRU THRESHOLD FOR WHEELCHAIR RECEPTORS

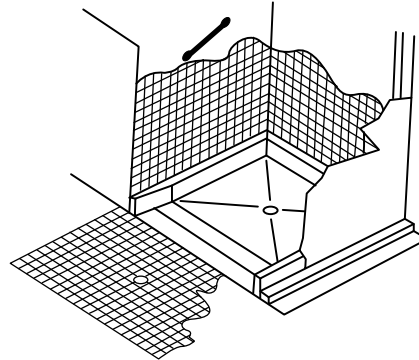

| WITH STAINLESS STEEL THRESHOLD ONLY |          |                   |             |             |              |            |            |                |
|-------------------------------------|----------|-------------------|-------------|-------------|--------------|------------|------------|----------------|
| MODEL                               | SIZE     | APPROX. SHIP WT.  | A           | B           | C            | D          | E          | ADA COMPLIANCE |
| WTR-4990                            | 36"x 36" | 350 lbs / 159 kg  | 36"(914mm)  | 36"(914mm)  | 18"(457mm)   | 12"(305mm) | 12"(305mm) |                |
| WTR-4995                            | 39"x 39" | 365 lbs / 166 kg  | 39"(991mm)  | 39"(991mm)  | 19.5"(495mm) | 12"(305mm) | 12"(305mm) | YES            |
| WTR-5000                            | 48"x 48" | 603 lbs / 274 kg  | 48"(1219mm) | 48"(1219mm) | 24"(610mm)   | 18"(457mm) | 12"(305mm) |                |
| WTR-5001                            | 60"x 48" | 623 lbs / 283 kg  | 60"(1524mm) | 48"(1219mm) | 30"(762mm)   | 18"(457mm) | 12"(305mm) |                |
| WTR-5002                            | 60"x 60" | 855 lbs / 388 kg  | 60"(1524mm) | 60"(1524mm) | 30"(762mm)   | 24"(610mm) | 12"(305mm) |                |
| WTR-5003                            | 42"x 70" | 800 lbs / 363 kg  | 42"(1067mm) | 70"(1778mm) | 21"(533mm)   | 9"(229mm)  | 12"(305mm) | YES            |
| WTR-5004                            | 48"x 70" | 880 lbs / 399 kg  | 48"(1219mm) | 70"(1778mm) | 24"(610mm)   | 9"(229mm)  | 12"(305mm) | YES            |
| WTR-5005                            | 60"x 70" | 1250 lbs / 567 kg | 60"(1524mm) | 70"(1778mm) | 30"(762mm)   | 9"(229mm)  | 12"(305mm) | YES            |
| WTR-5006                            | 60"x 30" | 590 lbs / 268 kg  | 60"(1524mm) | 30"(762mm)  | 30"(762mm)   | 12"(305mm) | 12"(305mm) |                |
| WTR-5007                            | 60"x 36" | 600 lbs / 272 kg  | 60"(1524mm) | 36"(914mm)  | 30"(762mm)   | 12"(305mm) | 12"(305mm) |                |